

VOLA 100, 100X, 200, 200V, 300
VOLA 400DV, 400, 400V, 400N, 400NV, 400T
VOLA 400TV, 400F, 400FV, 400R, 400RV
VOLA 2100, 2100X, 2200, 2200V, 2300, 2400
VOLA 2400V, 2400N, 2400NV, 2400T, 2400TV
VOLA 2400F, 2400FV, 2400R, 2400RV

Fitting instruction Monteringsv gledning
Montageanleitung Montage hanleiding
Monteringsvejledning Manuel de montage

04/00029
04/00031
04/00055

www.vola.com

100-2100_V3_40998502
09-01-2024

5 705230 286211

vola.com	L	L1	L2	H	H1	D
100, 100X, 200V, 300, 400V, 400DV, 2100, 2100X, 2200V, 2300, 2400V	377 mm 14 3/4"	260 mm 10"	268 mm 10 1/2"	95 mm 3 3/4"	186 mm 7 3/8"	70 mm 2 3/4"
400NV, 400TV, 2400NV, 2400TV	475 mm 18 3/4"	355 mm 14"	367 mm 14 1/2"			
400FV, 400RV, 2400FV, 2400RV	552 mm 21 3/4"	435 mm 17"	447 mm 17 5/8"			



VR968: To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Best lls separat.
Apart te bestellen.
  commander s par ment.

A	Data, 3 Bar/43.5 Psi:			Max. 65°C, 150°F
		l/min.	Gal/min.	
	100:	18,3	4.8	Max.: 10 Bar/145 psi
	400V:	15,6	4.1	
	2100:	25,2	6.7	
	2400V:	22,2	5.9	

B Check the local legislation.
Bitte die  rtlichen Vorschriften  berpr fen.
Tjek de lokale regler.
Kontrollera den lokala lagstiftning.
Verifieer de lokale regelgeving.
V rifiez la l gislation locale.

**!DO NOT!
!REMOVE!**

C DE:
Bitte separat beiliegende Anleitung f r die Schalld mpfer VR1249 beachten

DE:
Bitte separat beiliegende Anleitung f r die Schallentkopplung VR972 beachten

D

Box till inbygggnadsblandare.
Boks til indbygningsblander.
Laatikko sein asenteiselle sekoittajalle.

Ing r inte i leveransen, k ps separat.
Ikke inkludert, k pes separat.
Eiv t sis lly tilaukseen, ostettava erikseen.

Extension
Verl ngerung
Forl ngerdele
F rl ngning
Aanpassing
Modification

STD	+10	+20
+30	+40	+50

T Min. 3 mm
Max 65 mm

Y Min. 48 mm
Max. 110 mm

T	Y	VR1260/2260/1400/2019
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

Fitting of extension
Montage von verl ngerung
Montering af forl ngerdele

Montering av f rl ngning
Montage van de verlengstukken
Montage des rallonges













VR1260+

VR2260+


VR2019+, VR2119+

VR1400+

400-2400

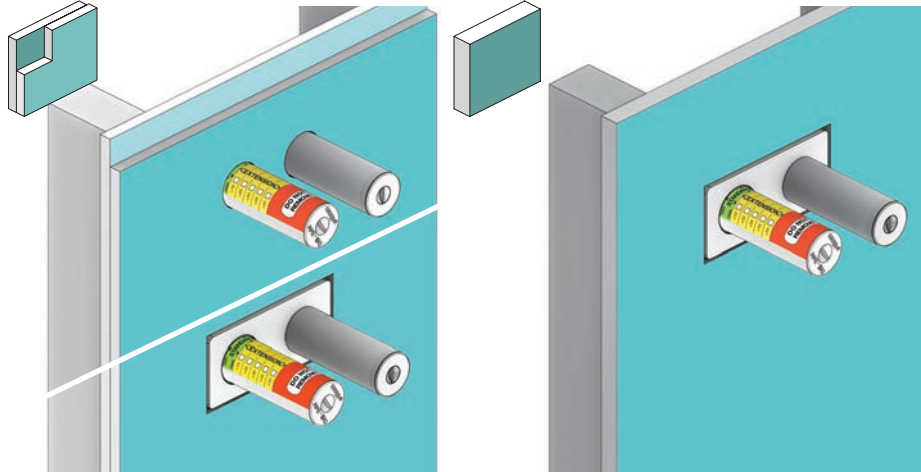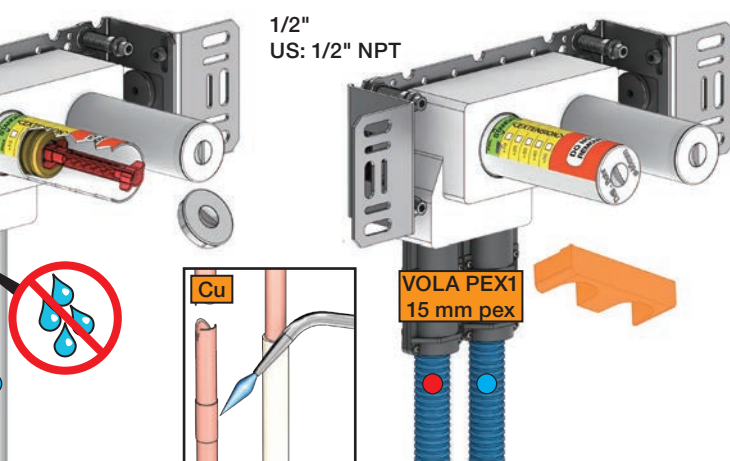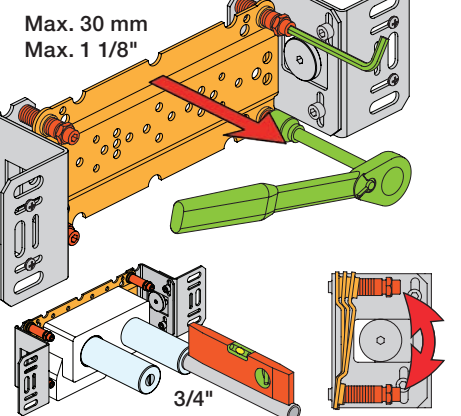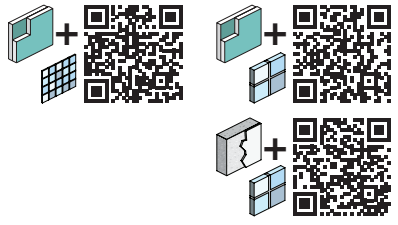

Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
* Skär inte membranet
Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana



*Membran används inte i SVERIGE,
ihop med inbygggnadsboxen.


NR.21:

1

NR.28+19+24:


2

Förlängning
Verlängerung
Forlængelse
Modification



VR2260/VR1400/VR2019


Tiles:	3 - 15 mm	Std.
Fliesen:	15 - 25 mm	+10
Fliser:	25 - 35 mm	+20
Tegels:	35 - 45 mm	+30
Carreaux:	45 - 55 mm	+40
	55 - 65 mm	+50




VR2260/VR1400/VR2019

	35 - 47 mm	Std.
	25 - 35 mm	+10
	15 - 25 mm	+20
	5 - 15 mm	+30
	-5 - 5 mm	+40
	-15 - -5 mm	+50

NR 21



NR 21 - 1



VR2279


VR2279B

VR2279C




		A
VR2279	16 mm	30 - 34 mm
VR2279B	12 mm	26 - 30 mm
VR2279C	8 mm	22 - 26 mm


NR 21 - 2




NR 21 - 3




NR 21 - 4






VR1260/VR1400/VR2019		
Titles: Fliessen: Fliessen:	Tegels: 3 - 15 mm	Std.
	Carreaux: 15 - 25 mm	+10
	25 - 35 mm	+20
	35 - 45 mm	+30
	45 - 55 mm	+40
	55 - 65 mm	+50



VR1260/VR1400/VR2019		
	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
	0 - 10 mm	+40
	-10 - 0 mm	+50


NR 19/NR24



NR 19:
Ø40 mm
Ø1 5/8"

NR 24:
Ø43 mm
Ø1 3/4"

NR 28





NR 28 - 1

VR3279

VR3279B

NR 28 - 2

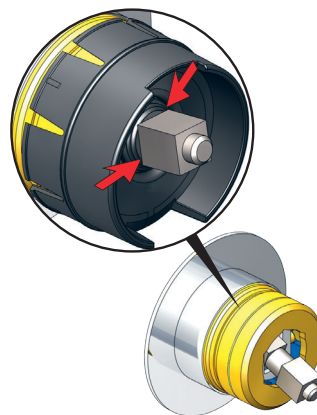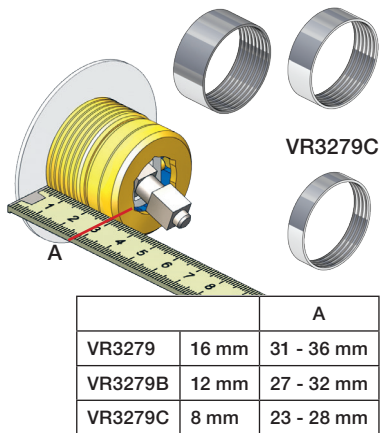


NR 19 - 1 NR 24 - 1


VR2204

VR2204B


VR2204C

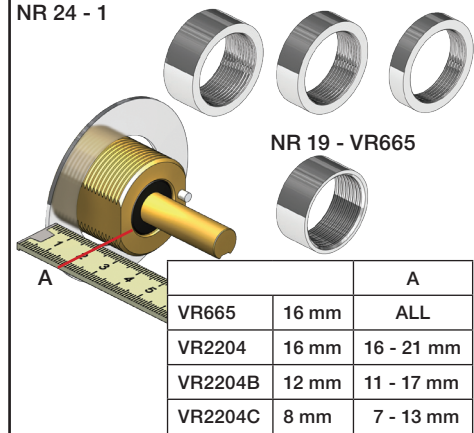


NR 28 - 3

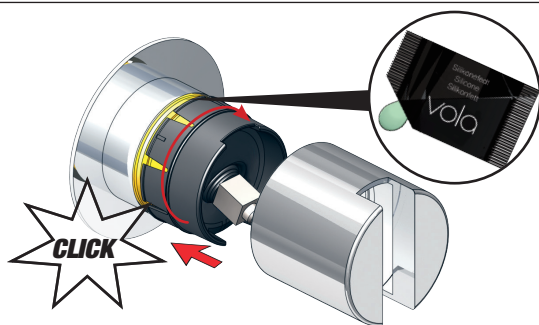

NR 28 - 4



NR 19 - 2 NR 24 - 2




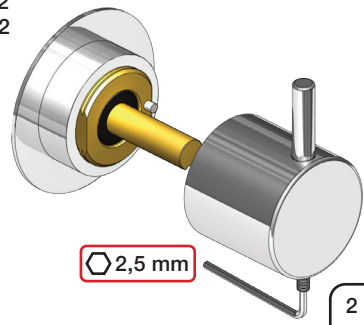


2400V


Diagram illustrating the exploded view of a 2400V electrical assembly, showing various components and their assembly sequence:

- Top Assembly:** Includes components 406, 2213+, 1400+, 403, 21, and 2205+.
- Right Assembly:** Includes components 2204C, 2204B, 2204, 2424, NR24*, NR24**, 2A, and 23.
- Central Assembly:** Includes components 1400, 406, 2213, 403, 21, 2205, 969, 2269, 2260, 2279, 1275, 22, 20D, 2273, 2278, 2279B, 2279C, 2273L, and 2273M.
- Bottom Left Assembly:** Includes components 1902, 1902+, 972, D: 1249K, and 1249.
- Bottom Right Assembly:** Includes components 1410, 1411, and 968.


NR21:	VR20D, VR22, VR1275, VR2269, VR2273, VR2278, VR2279, VR2279B, VR2279C
NR24*:	VR2A, VR22, VR1419, VR2204, VR2204B, VR2204C - (Brass, Messing, Laiton)
NR24**:	VR2A, VR22, VR1419, VR2204 - (Stainless steel, Edelstahl, Rustfrit stål, Acier inoxydable)
VR1277K:	VR22, VR2269, VR1277
VR1400:	VR21, VR23, VR406, VR1902, VR2213

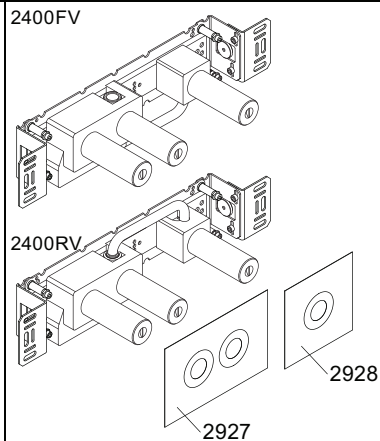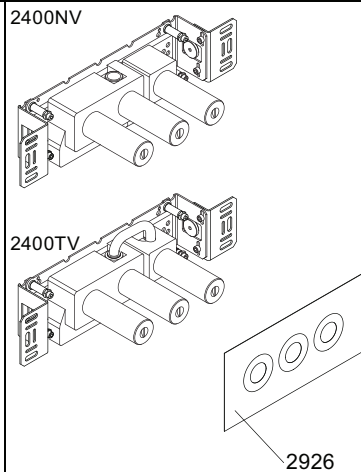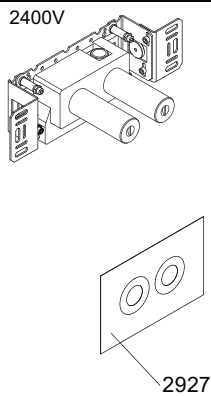


1040



2003K



2004



2003



2001, 001G



2001, 001G, 001



2001, 001G, 001



voia®

Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA 2400

2400V/FV/NV/RV/TV

Date May. 22

Rev. 5

Sheet
SB 10.10